

**CENTRAL LOCKS FOR EMERGENCY EXITS**

Central lock, slip-on version for aluminium uprights , available with flat front and "U" shaped front, equipped with spring latch and pivoting bolt for emergency exits.

Bolt operated with the cylinder and by operating the push-bar of the panic exit device from the inside (EMERGENCY function).

Spring latch operated with the cylinder and with the 8 mm handle spindle (from the outside).

Cylinder handle C/C distance 85 mm.

Bolt with thickness of 10 mm and minimum protrusion of 24 mm.

Spring latch with 10 mm protrusion.

Flat front plate 24x3 mm.

**Materials**

Lock cover plate and case plate in zinc plated steel

Front in stainless steel

Spring latch and bolts in nickel-plated steel


Zinc plated steel cylinder fixing screw

Lock fixing screws in stainless steel



**מנעול לשון נופלת לידיית בהלה AP100**

Flat front

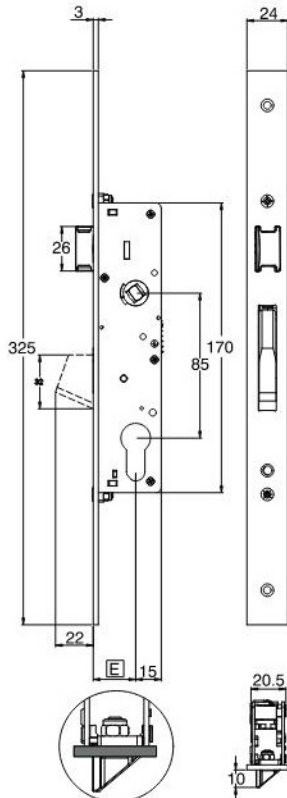

U-front

